




SERIES 62 BALL VALVES

2 PIECE FLANGED - LEVER OPERATOR

CAST IRON - DN15-DN300

F:F DIMENSIONS - ANSI 150#

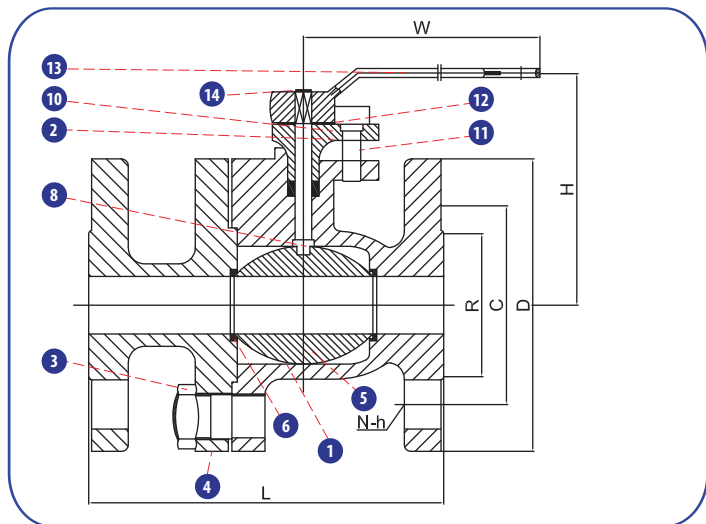

MATERIALS OF CONSTRUCTION

PART	MATERIAL
1 Body	Cast Iron (GG25), Ductile Iron (GGG40)
2 Bonnet	Cast Iron (GG25), Ductile Iron (GGG40)
3 Nut	Carbon Steel (ASTM A307)
4 Bolt	Carbon Steel (ASTM A307)
5 Ball	Stainless Steel
6 Seat	PTFE
7 Gasket	PTFE
8 Stem	Stainless Steel
10 Gland Flange	Cast Iron (GG25), Ductile Iron (GGG40)
11 Gland Bolt	Carbon Steel (ASTM A307)
12 Stop Collar	Carbon Steel
13 Lever	Steel
14 Circlip	Carbon Steel

DIMENSIONS (ANSI B16.10)

DN	L	D	C	R	T	N-h	W	H
15	108	89	60.5	35	12.0	4-15	115	72
20	117	98	70.0	43	12.0	4-15	115	76
25	127	108	79.5	51	12.0	4-15	150	92
40	165	127	98.5	73	14.3	4-16	200	123
50	178	152	120.5	92	15.9	4-19	200	132
65	190	178	139.5	105	17.5	4-19	320	164
80	203	190	152.4	127	19.1	4-19	320	173
100	229	229	190.5	157	23.9	8-19	450	210
150	394	279	241.5	216	26.0	8-22	850	288
200	457	343	298.5	270	29.0	8-22	1200	374
250	533	406	362	324	31.0	12-25	1420	366
300	610	483	432	381	32.0	12-25	1420	412

FEATURES & BENEFITS

- High performance 2 piece body design
- Full bore
- Blow out proof stem design
- Quarter turn on/off operation
- Low torque
- Long cycle life
- Rugged design

OPTIONS

- Locking device

FLANGE DRILLING

- DIN
- BS
- ANSI
- JIS

APPLICATIONS

- General Industry
- Food & Beverage
- Plant Services
- Water
- Light Chemicals

FAST TRACK

In house manufacture and stock holdings allow KDV to deliver quickly, and reliably facilitate fast-track projects.

Visit our website for information on the full range of KDV Industrial Valves

www.kdvflow.com