




SERIES 62 BALL VALVES

2 PIECE FLANGED - LEVER OPERATOR

CAST IRON - DN15-DN300

F:F DIMENSIONS - DIN PN16

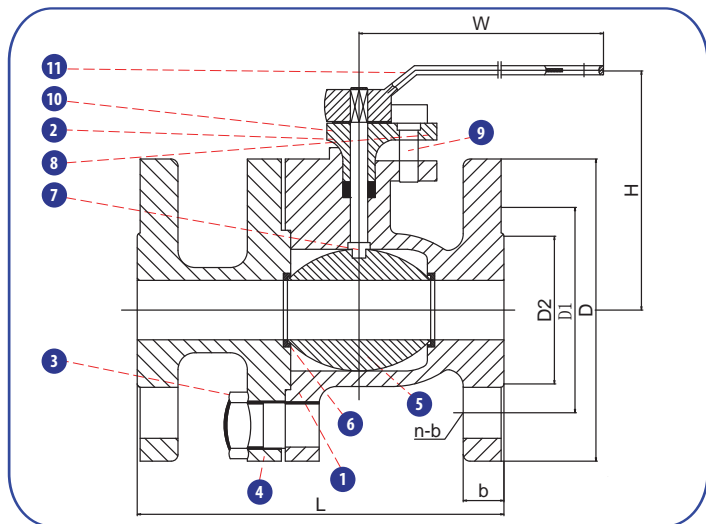

MATERIALS OF CONSTRUCTION

PART	MATERIAL
1 Body	Cast Iron (GG25), Ductile Iron (GGG40)
2 Bonnet	Cast Iron (GG25), Ductile Iron (GGG40)
3 Nut	Carbon Steel
4 Bolt	Carbon Steel
5 Ball	Stainless Steel
6 Seat	PTFE
7 Stem	Stainless Steel
8 Gland	Cast Iron (GG25), Ductile Iron (GGG40)
9 Gland Bolt	Carbon Steel
10 Stop Collar	Carbon Steel
11 Lever	Ductile Iron (GGG40)

DIMENSIONS (DIN PN16)

DN	L	H	W	D2	D1	D	b	n-b
15	115	78	130	45	65	95	14	4-14
20	120	113	160	58	75	105	16	4-14
25	125	107	160	68	85	115	16	4-14
32	130	113	160	78	105	140	16	4-18
40	140	130	250	88	110	150	16	4-18
50	150	146	250	102	125	165	18	4-18
65	170	176	350	122	145	185	18	4-18
80	180	222	350	138	160	200	20	8-18
100	190	222	400	158	180	220	20	8-18
125	325	257	750	188	210	250	22	8-18
150	350	275	850	212	240	285	22	8-23
200	400	340	1200	268	295	340	24	12-23
250	450	468	G.B	320	355	405	26	12-26
300	500	514	G.B	370	410	460	32	12-28

FEATURES & BENEFITS

- High performance 2 piece body design
- Full bore
- Blow out proof stem design
- Quarter turn on/off operation
- Low torque
- Long cycle life
- Rugged design

OPTIONS

- Locking device

FLANGE DRILLING

- DIN
- BS
- ANSI
- JIS

APPLICATIONS

- General Industry
- Food & Beverage
- Plant Services
- Water
- Light Chemicals

FAST TRACK

In house manufacture and stock holdings allow KDV to deliver quickly, and reliably facilitate fast-track projects.

Visit our website for information on the full range of KDV Industrial Valves

www.kdvflow.com